




J02014LiYCY Series Screened Jayflex Sub-Miniature Cables

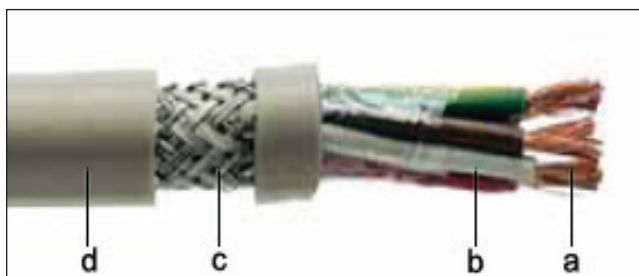

Cable Construction

- a. 0,14mm² (18 x 0,10mm) Copper Conductors to DIN VDE 0812
 - b. PVC Insulation
 - c. Tinned Copper Braid Screen
 - d. PVC Grey Sheath
- 350v Grade
 - -30°C to + 70°C (fixed), -5°C to + 70°C (flexible)
 - Fire Performance: Flame retardant and self-extinguishing acc. to IEC 60332-1 + EN 50265-2-1 + VDE 0482 part 265-2-1
 - Oil Resistant
 - Rohs Compliant

LiYCY Flexible Braid Screened PVC Data Cable

Jaycor Part Number	Nominal Conductor mm ²	Number of cores	Nominal OD mm
J02014LIYCY02GY	0,14	02	3,6
J02014LIYCY04GY	0,14	04	4,0
J02014LIYCY07GY	0,14	07	4,6
J02014LIYCY12GY	0,14	12	6,2
J02014LIYCY25GY	0,14	25	8,6

Disclaimer: We have made a great effort to ensure the accuracy of information presented in this website, but although the information is believed to be reliable, errors and omissions may still exist. The onus is on the user to determine the suitability of the product for their particular requirements and must assume all risk and liability in connection therewith. The listing of information is presented as a courtesy and does not ensure that a product is always available. Product availability and specifications should be confirmed by contacting our sales department. All information contained in this website is subject to alteration without prior notice and is therefore subject to confirmation.