J71 Fibre Pigtails

Application

Gigabit Ethernet
Telecommunication Networks
Active Device Termination
Video
Industrial
Multimedia
Military
Premise Installations

Availability

PC & APC Pigtail Available
Various Boot (cable) Sizes Available
12 Standard Color Pigtails Available
Blister Packing Available

Features

High Temperature Stability
Good Exchangeability
Good Durability
Low Insertion Loss
High Back Reflection Loss
Standard: Telcordia GR-326-CORE

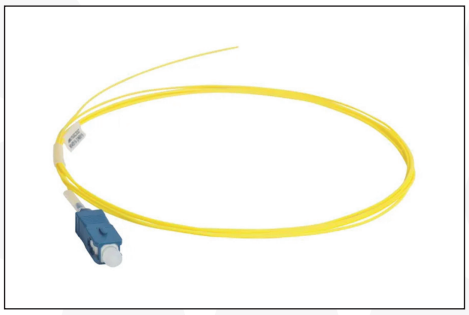

Part Number System

Range	Mode	Pigtail	Fibre Connector	Fibre Type	Length (m):
Fibre Patch Cord	SM - Singlemode MM - Multimode	UJPT - Unjacketed Pigtail	LC, SC, FC, ST, MTRJ, E200 (Variant APC angled polish)	OS2, OM1, OM2, OM3, OM4	0,5, 1, 2, 5, Custom
J71	**.** **SM**	**.** **UJPT**	**.** **LC**	**.** **OS2**	**-** **1**

Example: J71.SM.UJPT.LC.OS2-1 1m LC SM unjacketed pigtail

Item	Single Mode	Multimode
Insertion Loss	< 0.2 dB	< 0.2 dB
Return Loss	UPC ≥ 55 dB	UPC ≥ 35 dB
Repeatability	< 0.1 dB	< 0.1 dB
Durability	< 0.2 dB typical change after 1000 matings	< 0.2 dB typical change after 1000 matings
Interchangeability	< 0.1 dB	< 0.1 dB
Operating Temperature	-40°C to +85°C	-40°C to +85°C

Part Number	Description
J71.MM.UJPT.FC.OM2-1	1m FC MM unjacketed pigtails, OM2
J71.MM.UJPT.FC.OM3-1	1m FC MM unjacketed pigtails, OM3
J71.SM.UJPT.FC.OS2-1	1m FC SM unjacketed pigtails, OS2
J71.MM.UJPT.LC.OM2-1	1m LC MM unjacketed pigtails, OM2
J71.MM.UJPT.LC.OM3-1	1m LC MM unjacketed pigtails, OM3
J71.SM.UJPT.LC.OS2-1	1m LC SM unjacketed pigtails, OS2
J71.MM.UJPT.SC.OM2-1	1m SC MM unjacketed pigtails, OM2
J71.MM.UJPT.SC.OM3-1	1m SC MM unjacketed pigtails, OM3
J71.SM.UJPT.SC.OS2-1	1m SC SM unjacketed pigtails, OS2
J71.MM.UJPT.ST.OM2-1	1m ST MM unjacketed pigtails, OM2
J71.MM.UJPT.ST.OM3-1	1m ST MM unjacketed pigtails, OM3
J71.SM.UJPT.ST.OS2-2	2m ST SM unjacketed pigtails, OS2

Copyright© JAYCOR International (PTY) Ltd.