



inserts:		page
<b>CDD</b> .....	24 poles + ⊕	53
<b>CQE</b> .....	10 poles + ⊕	74
<b>CN</b> .....	6 poles + ⊕	80
<b>CCE</b> .....	6 poles + ⊕	86
<b>CNE, CSE</b> .....	6 poles + ⊕	87
<b>CSS</b> .....	6 poles + ⊕	98
<b>MIXO</b> .....	2 modules	137-151

insert centre distance:  
44 x 27 mm

surface mounting housings with single lever




description	part No.	entry Pg	part No.	entry M
	with lever	<b>CHP 06 L</b>	16	<b>MHP 06 L20</b>
with lever	<b>CHP 06 L2</b>	16 x 2	<b>MHP 06 L220</b>	20 x 2
with lever, high construction	<b>CAP 06 L</b>	21	<b>MAP 06 L32</b>	32
with lever, high construction	<b>CAP 06 L2</b>	21 x 2	<b>MAP 06 L232</b>	32 x 2
with lever, high construction	<b>CAP 06 L29</b>	29	<b>MAP 06 L40</b>	40
with lever, high construction	<b>CAP 06 L229</b>	29 x 2	<b>MAP 06 L240</b>	40 x 2
with lever and cover	<b>CHP 06 LS</b>	16	<b>MHP 06 LS20</b>	20
with lever and cover	<b>CHP 06 LS2</b>	16 x 2	<b>MHP 06 LS220</b>	20 x 2
with lever and cover, high construction	<b>CAP 06 LS</b>	21	<b>MAP 06 LS32</b>	32
with lever and cover, high construction	<b>CAP 06 LS2</b>	21 x 2	<b>MAP 06 LS232</b>	32 x 2
with lever and cover, high construction	<b>CAP 06 LS29</b>	29	<b>MAP 06 LS40</b>	40
with lever and cover, high construction	<b>CAP 06 LS229</b>	29 x 2	<b>MAP 06 LS240</b>	40 x 2


**N.B.:** the enclosures ensure IP66 protection (or IP65 cover versions) rating when mated and locked with the closing levers.  
The cover (CS, CP) only ensures mechanical protection, but does not ensure IP65 protection rating.

dimensions in mm

CHP L - CAP L and MHP L - MAP L

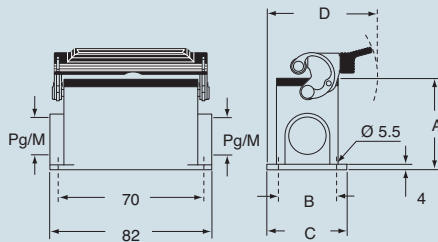

CHP LS - CAP LS and MHP LS - MAP LS

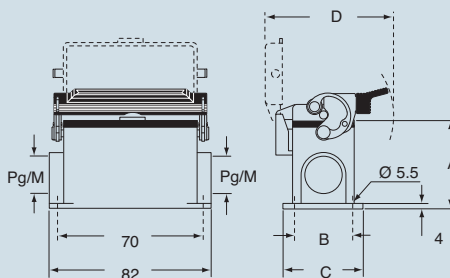

**CALUS**® Type 4/4X/12

type	A	B	C	D
<b>CHP L / MHP L</b>	53	40	52	73.5
<b>CAP L / MAP L</b>	74	45	57	82
<b>CHP LS / MHP LS</b>	53	40	52	97
<b>CAP LS / MAP LS</b>	74	45	57	97

dimensions shown are not binding and may be changed without notice