

enclosures: **size "104.27"**

- standard** page: 212 - 216
- for 180 °C** page: 222
- aggressive environments** page: 223
- EMC** page: 224


panel supports:

- COB** page: 258 - 259

- characteristics according to EN 61984:

- 16A 400V 4kV 2**
- UL, CSA, CCC, GL certified
- for maximum current load, see the insert load curve section on page 31

**inserts,
screw terminal connections**

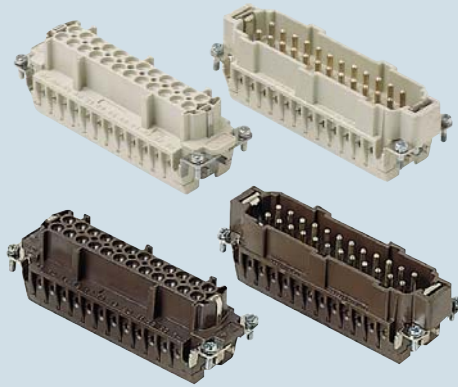

description	part No.
indirect, with plate 1) female inserts with female contacts male inserts with male contacts	CNF 24 CNM 24
indirect, with plate 1), use in up to 180 °C female inserts with female contacts, brown male inserts with male contacts, brown	CNF 24 RY CNM 24 RY
1) for non-prepared conductors	dimensions in mm
	contacts side (front view)
	<ul style="list-style-type: none"> - inserts with plate, for section conductors: 0.75 - 2.5 mm² - AWG 18 - 14 - torsion couple recommended for conductor fastening screws and stripping length see section feature of inserts on page 13
dimensions shown are not binding and may be changed without notice	