

CR metal cable glands



- IP65 degree of protection (EN 60529) for use with connector enclosures
- Pg threading according to DIN 40430 and DIN 46320
- made of die-cast aluminum alloy
- anti-aging rubber gasket
- washers in zinc-plated steel

metal cable clamps with collar, including gaskets and washers




metal cable clamps without collar, gaskets and washers



description	part No.	Pg threading	part No.	Pg threading
- rubber hole Ø 12 mm - rubber hole Ø 14 mm - rubber hole Ø 18 mm - rubber hole Ø 25 mm - rubber hole Ø 32 mm - rubber hole Ø 38 mm	CRS 13.5 CRS 16 CRS 21 CRS 29 CRS 36 CRS 42	13.5 16 21 29 36 42		
without gasket and washer, not coated (order separately) - threading Pg 16 - threading Pg 21			CRS 16 C CRS 21 C	
kit comprising a full gasket and two washers (for cable anchoring CRS..C) - rubber hole Ø 14 mm - rubber hole Ø 18 mm			CRA 16 CRA 21	16 21
kit comprising a multiple gasket and two washers (for cable anchoring CRS..C) - rubber hole Ø 7.5 - 10 - 12.5 - 15 mm - rubber hole Ø 13 - 10 - 16 - 19 mm			CRAC 16 CRAC 21	16 21

dimensions in mm


CRS

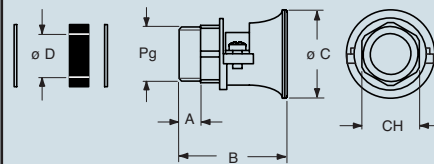

CRS	A	B	ø C	ø D	CH
13.5	7	36	28	12	22
16	8.5	41	32	14	24
21	10	47	39	18	30
29	10.5	58	55	25	41
36	13	67.5	67	32	50
42	13	72.5	75	38	55


dimensions in mm

CRS..C

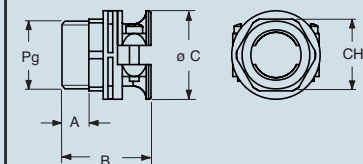


CRS..C	A	B	ø C	CH
16	8	30	30	24
21	10	36	37	30

CRA



CRA	ø D
16	14
21	18

CRAC



CRAC	ø D
16	7.5 - 10 - 12.5 - 15
21	10 - 13 - 16 - 19

Dimensions indicated are not binding and may be changed without prior notice.