


JAYFLEX CABLE

J010003/5JZ50 Series Jay-Oil Flexible Cable 300/500V

- a. Multi-strand plain copper conductors to DIN VDE 0295 class 5 + IEC 60228 class 5 + HD 383 class 5
 - b. PVC insulation T12 acc. to DIN VDE 0281 part 1 + HD 21.1
 - c. Oil resistant and flame retardant Grey PVC, TM2 acc. to DIN VDE 0281 part 1 + HD 21.1
- 300/500V grade
(Test voltage: 3000V acc. to DIN VDE 0472 part 508)
 - Black numbered cores + 1 Green/yellow earth core

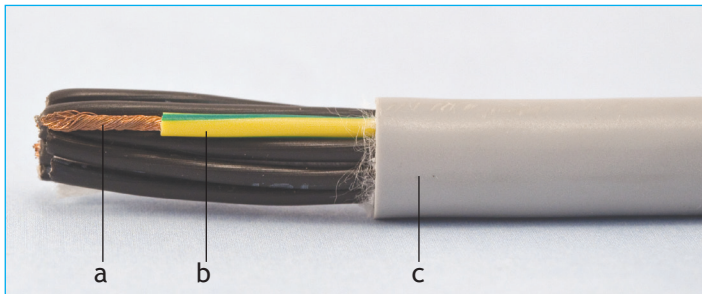

Flexible cables suitable for use as signal, measurement and control cables in data processing equipment, office machines and machine tools, in dry, moist and wet environments. Also used in plant construction and Power Stations. The cable is extremely oil resistant.

Temperature rating: -5°C to +80°C.

JAYFLEX CABLE

Jaycor Part Number	Conductor Size (mm ²)	Strandings (no./mm)	No. of cores	Nominal O.D. (mm)
J010503/507JZ50	0,5	16/0,20	7	7,4
J010503/512JZ50	0,5	16/0,20	12	9,1
J010753/502JZ50	0,75	24/0,20	2	5,7
J010753/503JZ50	0,75	24/0,20	3	6,2
J010753/504JZ50	0,75	24/0,20	4	6,2
J010753/507JZ50	0,75	24/0,20	7	8,1
J010753/512JZ50	0,75	24/0,20	12	9,9
J010753/520JZ50	0,75	24/0,20	20	12,6
J010753/525JZ50	0,75	24/0,20	25	14,5
J010753/532JZ50	0,75	24/0,20	30	15,6
J010753/540JZ50	0,75	24/0,20	40	17,6
J010753/550JZ50	0,75	24/0,20	50	19,8
J011003/502JZ50	1,0	32/0,20	2	5,9
J011003/503JZ50	1,0	32/0,20	3	6,4
J011003/504JZ50	1,0	32/0,20	4	7
J011003/507 JZ50	1,0	32/0,20	7	8,6
J011003/508JZ50	1,0	32/0,20	8	9,4
J011003/512JZ50	1,0	32/0,20	12	10,7
J011003/520JZ50	1,0	32/0,20	20	13,5
J011003/525JZ50	1,0	32/0,20	25	15,6
J011003/530JZ50	1,0	32/0,20	30	16
J011003/540JZ50	1,0	32/0,20	40	18,9
J011003/550JZ50	1,0	32/0,20	50	21
J011503/502JZ50	1,5	30/0,25	2	6,3
J011503/503JZ50	1,5	30/0,25	3	6,7
J011503/504JZ50	1,5	30/0,25	4	7,3
J011503/507JZ50	1,5	30/0,25	7	9,8
J011503/512JZ50	1,5	30/0,25	12	12,1
J011503/520JZ50	1,5	30/0,25	20	15,2
J011503/525JZ50	1,5	30/0,25	25	17,8
J011503/541JZ50	1,5	30/0,25	41	21
J011503/550JZ50	1,5	30/0,25	50	23,7
J012503/503JZ50	2,5	50/0,25	3	8,6
J012503/504JZ50	2,5	50/0,25	4	9,1
J012503/507JZ50	2,5	50/0,25	7	12,1
J012503/512JZ50	2,5	50/0,25	12	15,2
J012503/518JZ50	2,5	50/0,25	18	18,1
J022503/521JZ50	2,5	50/0,25	21	20,9
J022503/525JZ50	2,5	50/0,25	25	22,8
J014003/504JZ50	4,0	56/0,30	4	11
J014003/505JZ50	4,0	56/0,30	5	12,6

The above cable types are also available with different conductor sizes and core combinations.