


JAYFLEX CABLES

J01HF Hi-Flex PVC/PVC Cable 300/500V



- a. Extra finely stranded plain copper conductors
- b. Special PVC insulation
- c. Fleece wrapping
- d. Flexible grade PVC sheath, Grey
 - 300/500V grade
 - Black numbered cores

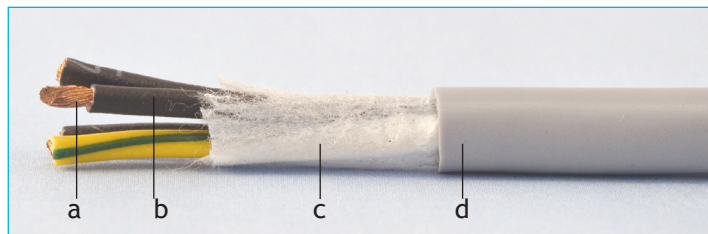

Highly flexible cables for use in robotic and cable drag chain applications. The cable is extensively oil resistant, self-extinguishing and Flame Retardant.

Temperature rating: -40°C to +70°C (Fixed), +5°C to +70°C (Flexing).

Jaycor Part Number	Conductor Size (mm ²)	Strandings (no./mm)	No. of cores	Nominal O.D. (mm)
J010753/504HF	0,75	42/0,15	4	6,4
J010753/507HF	0,75	42/0,15	7	8,3
J010753/512HF	0,75	42/0,15	12	10,2
J010753/520HF	0,75	42/0,15	20	12,8
J011003/507HF	1,0	56/0,15	7	8,8
J011003/512HF	1,0	56/0,15	12	10,8
J011003/520HF	1,0	56/0,15	20	13,6
J011003/525HF	1,0	56/0,15	25	15,8
J011503/504HF	1,5	84/0,15	4	7,4
J011503/507HF	1,5	84/0,15	7	9,9
J011503/512HF	1,5	84/0,15	12	12,1
J012503/504HF	2,5	140/0,15	4	9,1
J012503/507HF	2,5	140/0,15	7	12,2
J012503/512HF	2,5	140/0,15	12	15,2

The above cable types are also available with different conductor sizes and core combinations.