


JAYFLEX SCREENED CABLES

J0200066 Steel Braid Screened PVC Cable 660V

- a. Multistrand plain or tinned copper conductors
- b. PVC insulation
- c. PVC inner sheath
- d. Galvanised steel wire braided screen
- e. PVC sheath - grey
 - 660V grade
 - 2 to 5 cores - coloured cores
 - Above 5 cores - black numbered cores + 1 green/yellow earth core
 - Temperature rating: 0°C to +70°C.

The steel wire braided screen provides high mechanical protection whilst allowing the cable to be exceptionally flexible.

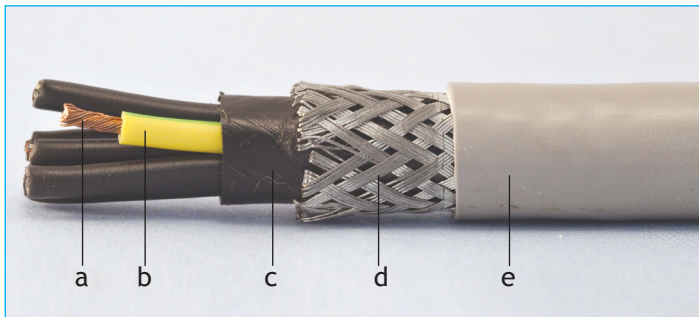

Jaycor Part Number	Conductor Size (mm ²)	Strandings (no./mm)	No. of cores	Nominal O.D. (mm)
J020756602	0,75	24/0,20	2	10
J020756603	0,75	24/0,20	3	11
J020756604	0,75	24/0,20	4	12
J020756607	0,75	24/0,20	7	15
J020756612	0,75	24/0,20	12	17
J020756620	0,75	24/0,20	20	20
J020756634	0,75	24/0,20	34	23

JAYFLEX SCREENED CABLES

J0200066 Steel Braid Screened PVC Cable 660V

Continued...

Jaycor Part Number	Conductor Size (mm ²)	Strandings (no./mm)	No. of cores	Nominal O.D. (mm)
J021006602	1,0	32/0,20	2	11
J021006603	1,0	32/0,20	3	11
J021006604	1,0	32/0,20	4	12
J021006605	1,0	32/0,20	5	13
J021006607	1,0	32/0,20	7	14
J021006612	1,0	32/0,20	12	18
J021006620	1,0	32/0,20	20	22
J021006625	1,0	32/0,20	25	23
J021506602	1,5	30/0,25	2	11
J021506603	1,5	30/0,25	3	12
J021506604	1,5	30/0,25	4	13
J021506605	1,5	30/0,25	5	14
J021506607	1,5	30/0,25	7	15
J021506612	1,5	30/0,25	12	19
J021506620	1,5	30/0,25	20	21
J022506603	2,5	50/0,25	3	13
J022506604	2,5	50/0,25	4	14
J022506607	2,5	50/0,25	7	17
J024006603	4,0	56/0,30	3	14
J024006604	4,0	56/0,30	4	18
J024006607	4,0	56/0,30	7	20
J026006604	6,0	84/0,30	4	20
J0210006604	10,0	80/0,4	4	24
J0216006604	16,0	128/0,4	4	29

The above cable types are also available with different conductor sizes and core combinations on special request.