


JAYFOIL SCREENED DATA CABLES

J0602244 Foil Screened 0,22mm² Twisted Pair PVC Cable 440V

- a. 0,22mm² (7/0,20mm) tinned copper conductors
 - b. PVC insulation, TWISTED PAIRS
 - c. Tinned copper drain wire
 - d. Overall aluminium-mylar® foil screen
 - e. PVC sheath - grey
- 440V grade
 - Max. 1 amp.
 - Colour coded pairs

The overall foil screen provides 100% coverage thus protecting against external electrical interference on low and medium frequencies.

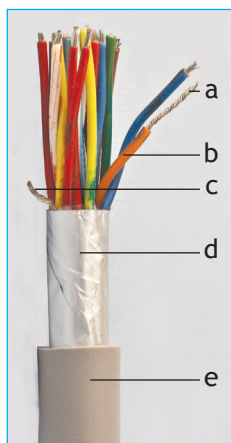

Jaycor Part Number	No. of pairs	Nominal O.D. (mm)
J060224401	1	3,2
J060224402	2	5,2
J060224403	3	5,7
J060224404	4	6,3
J060224406	6	7,2
J060224408	8	8,3
J060224410	10	9,1
J060224412	12	9,9
J060224418	18	12,3
J060224420	20	12,7
J060224425	25	14,3
J060224430	30	15,2
J060224436	36	16,9
J060224450	50	19,1

The above cable types are also available with different pair and core combinations.