


PVC PANEL WIRES

J13 High Flex 1KV PVC Panel Wires

- a. Very finely stranded plain copper conductors
- b. PVC (soft grade) insulation
 - 1000V grade
 - Temp.rating: -15°C to +80°C
 - XX - indicates wire colour required

Superflexible wires for testing, laboratory and research applications.

* Without obligation

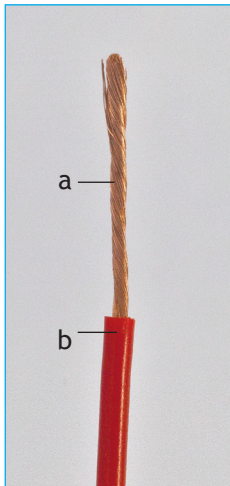

Jaycor Part Number	Conductor Size (mm ²)	Strandings* No / mm	Nominal O.D. (mm)
J1301010001XF-XX	0,1	51/0,05	1
J1301410001XF-XX	0,14	72/0,05	1,1
J1302210001XF-XX	0,25	65/0,07	1,4
J1305010001XF-XX	0,5	132/0,07	2
J1307510001XF-XX	0,75	195/0,07	2,2
J1310010001XF-XX	1,0	260/0,07	2,5
J1315010001XF-XX	1,5	192/0,10	3,5
J1325010001XF-XX	2,5	320/0,10	3,8
J1340010001XF-XX	4	512/0,10	5
J1360010001XF-XX	6	768/0,10	6,5
J13100010001XF-XX	10	1280/0,10	7,5
J13160010001XF-XX	16	2048/0,10	9
J13250010001XF-XX	25	3234/0,10	10,5
J13350010001XF-XX	35	4508/0,10	11,7
J13500010001XF-XX	50	6468/0,10	14,7
J13700010001XF-XX	70	8967/0,10	17