


POLYURETHANE CABLES

J24P Polyurethane Coiled Cable 500V

- Outstanding Abrasion and Oil Resistance

- a. Multistrand tinned copper conductors
 - b. EPM rubber insulation
 - c. Polyurethane sheath - ORANGE
- 500V grade
 - Colour Coded cores (up to 4 cores), above 4 cores black numbered cores plus one green/yellow earth core.
 - Each metre of retracted cable extends comfortably 4 times.

The cable has high durability and weather resistance, and protects against chemicals, fats and solvents. Suitable for heavy duty interconnections of trucks & trailers, mining machinery, and many types of plant maintenance.

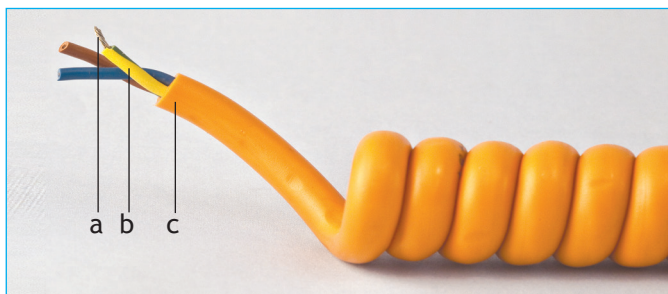

JAYCOR Part Number	Conductor Size (mm ²)	No. of cores	Cable O.D. (mm)	Coil O.D. (mm)
J24P0755002	0,75	2	6,5	22
J24P0755003	0,75	3	6,8	24
J24P0755004	0,75	4	7,5	26
J24P1005002	1,0	2	7	24
J24P1005003	1,0	3	7,1	30
J24P1005004	1,0	4	7,8	35
J24P1505002	1,5	2	8,3	26
J24P1505003	1,5	3	8,9	32
J24P1505004	1,5	4	9,8	40

POLYURETHANE CABLES

J24P Polyurethane Coiled Cable 500V

- Outstanding Abrasion and Oil Resistance

Continued...

JAYCOR Part Number	Conductor Size (mm ²)	No. of cores	Cable O.D. (mm)	Coil O.D. (mm)
J24P1505007	1,5	7	13,1	55
J24P1505012	1,5	12	16,3	66
J24P2505003	2,5	3	10,7	42
J24P2505004	2,5	4	12	50
J24P4005003	4,0	3	12,2	56
J24P4005004	4,0	4	13,8	60
J24P6005003	6,0	3	14,5	58
J24P6005004	6,0	4	17	62