


# MULTICORE TEFLON® CABLES

## J55 Screened Teflon® Cable (-60 °C to + 155°C) 600V

- a. Multistrand tinned copper conductors
  - b. Tefzel (ETFE) insulation
  - c. Overall tinned copper wire braid screen
  - d. Teflon (FEP) sheath - WHITE
- 600V grade
  - Colour coded cores

These cables are predominantly used for installations subject to high temperature effects, including the chemical industry, military and aircraft industries. The cables are nonflammable and resistant to acids, alkalis, solvents, oils and petrol.

Manufactured generally to MIL-C-27500 Specifications.

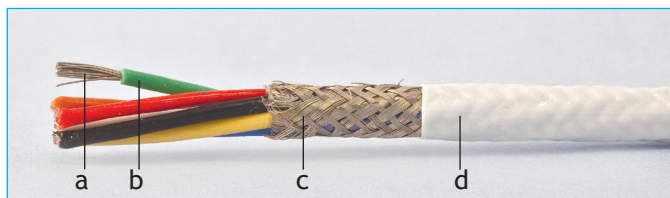

Jaycor Part Number	Conductor Size (mm <sup>2</sup> )	AWG	Strands/mm	Number of cores	Nominal O.D. (mm)
J550126001	0,12	26	19/0,10	1	1,95
J550126002	0,12	26	19/0,10	2	2,95
J550126004	0,12	26	19/0,10	4	3,36
J550226001	0,22	24	19/0,12	1	2,05
J550226002	0,22	24	19/0,12	2	3,15
J550226003	0,22	24	19/0,12	3	3,33
J550226004	0,22	24	19/0,12	4	3,6
J550226007	0,22	24	19/0,12	7	4,6
J550386001	0,38	22	19/0,16	1	2,2
J550386002	0,38	22	19/0,16	2	3,45
J550386003	0,38	22	19/0,16	3	3,65

# MULTICORE TEFLON® CABLES

J55 Screened Teflon® Cable (-60 °C to + 155°C) 600V

Continued...

Jaycor Part Number	Conductor Size (mm <sup>2</sup> )	AWG	Strands/mm	Number of cores	Nominal O.D. (mm)
J550386004	0,38	22	19/0,16	4	3,96
J550606001	0,6	20	19/0,20	1	2,45
J550606002	0,6	20	19/0,20	2	3,95
J550606003	0,6	20	19/0,20	3	4,19
J550606004	0,6	20	19/0,20	4	4,57
J550606007	0,6	20	19/0,20	7	5,95
J550606008	0,6	20	19/0,20	8	7
J550906001	0,9	18	19/0,25	1	2,7
J550906002	0,9	18	19/0,25	2	4,65
J550906004	0,9	18	19/0,25	4	5,41
J551246001	1,24	16	19/0,29	1	2,95
J551246002	1,24	16	19/0,29	2	5,15
J551246004	1,24	16	19/0,29	4	6,01
J551246007	1,24	16	19/0,29	7	7,3
J552006002	2,0	14	19/0,36	2	5,4
J553006002	3,0	12	37/0,32	2	6,2