


FIRE ALARM CABLES

PH120 and PH30 Circuit Integrity Fire Alarm Cable

- a. Plain copper conductor, class 1,2 and 5 in accordance with SANS 1411-1 with special fire resistant tape wrapping
- b. Halogen free polymer compound
- c. Overall aluminium-mylar® foil screen
- d. Tinned copper drain wire
- e. Halogen free fire retardant polymer Red sheath
 - 300/500V grade
 - Colour coded to DIN VDE

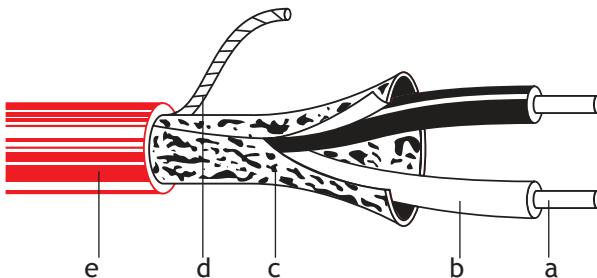

Jaycor Part Number	Conductor Size (mm ²)	No. of Cores	Nominal O.D. (mm)
J06PH301035002	1	2	7.4
J06PH121035002	1	2	8.4
J06PH301535002	1,5	2	8.9
J06PH121535002	1,5	2	9.9

Additional Core Combinations:

1mm ²	up to 24 cores
1,5mm ²	up to 16 cores
2,5mm ²	up to 08 cores
4,0mm ²	up to 04 cores