

## SUMMARY



### # Wires

Low	4
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0

### Download

[Request a quote](#)

[Catalog](#)

Series	P
Termination type	Female print PCB
IP rating	50
Cable Ø	0.00 - 0.00 mm
Matching parts	PAG.M0.4GL.AC39G

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	PP*: Elbow receptacle key (G) or keys (A,B,C) for printed circuit
Keying	1 key (alpha=0; Plug: male contact; Receptacle: female contact)
Housing Material	PSU (Polysulfone), gray
Cable Fixing	∅ 0 - 0 mm
Variant	

### Performance

Configuration	1P.M04 : 4 Low Voltage
Insulator	
Rated Current	8 Amps

### Specifications



Contact Type: Print (straight)  
Max. Matings: 2000  
Contact Dia.: 0.9 mm (0.0354in)  
R (max): 4.5 mOhm  
Test voltage (kV rms) Contact-contact: 1.2  
Air clearance min. (mm) or Creepage distance min. (mm): 1.2

### Others

F ret (min): 50 N  
F ret (max): 150 N  
IP Rating: 50

## DRAWINGS

### Draws

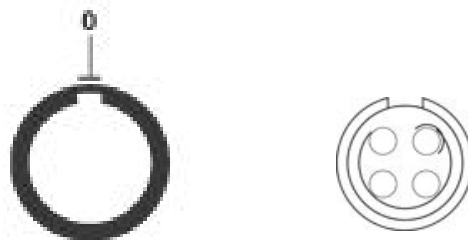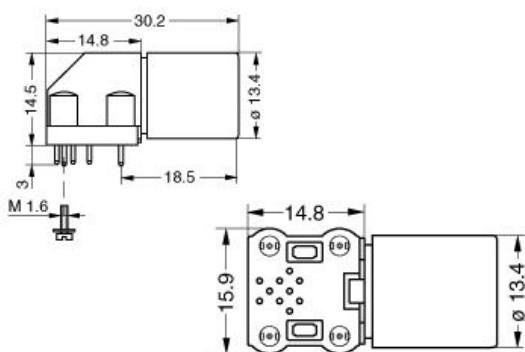

### Dimensions

	A	B	H	L	M
mm.	13.4	15.9	17.5	30.2	14.8
in.	0,53	0,63	0,69	1,19	0,58

## RECOMMENDED BY LEMO

### Tools

None

### Cables