

FFA.1E.275.CTAC60

SUMMARY

Wires

Low	0	
High	0	
Coax	1	
Triax	0	
Quad	0	
Fiber	0	
Fluidic	0	
Series	1E	
Termination type	hation type Male solder	
IP rating	68	
Cable Ø	5.60 - 6.00 mm	
Matching parts	ERA.1E.275.CTL	
Status	active	
Alternative part		



Image is for illustrative purpose only

Download

Request a quote Catalog

TECHNICAL DETAILS

Mechanics

Shell Style/Model	FFA*: Straight plug, cable collet
Keying	Circular (can rotate), plug has male contact(s)
Housing Material	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Cable Fixing	C60: 5.6 - 6 mm
Variant	

Performance

Configuration	1E.275 : 1 Coax (75 Ohm)
Insulator	T: PTFE
Rated Current	10 Amps

Specifications

Contact Type: Solder Vtest: 2400 V (AC), 3300 V (DC) Impedance: 75 Ohm

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.


VSWR: 1.02 + 0.08 * f/GHz Cable type: RG 179 B/U, RG 187 A/U, RG 58 C/U, RG 302 /U, RG 400 /U, 2YCCY, RG 59 B/U, RG 223 /U, HF-5408

Others

Endurance (Shell): 5000 mating cycles Temp (min / max): -55°C / +200°C Humidity (max): <=95% [at 60 deg C /140 F] Vibration: 15 g [10 Hz - 2000 Hz] Shock Resistance: 100 g [6 ms] Salt Spray Corrosion: >1000 hr Climatical Category: 50/175/21 Shielding (min): 95 dB (10 MHz) Shielding (min): 80 dB (1 GHz) IP Rating: 68

DRAWINGS

Draws

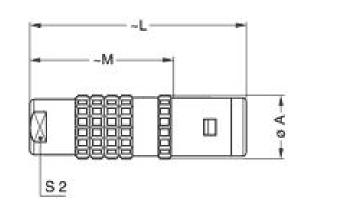

Dimensions

	А	L	Μ	S2
mm.	13	42	28	9
in.	0,51	1,65	1,10	0,35

RECOMMENDED BY LEMO

Tools

Spanner wrench: DCD.1E.008.PA090

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Cables

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.